

ALINCO

Quality. Style. Performance!

DJ-CRX7PLUS

DUAL BAND Analog Handheld Transceiver

**Best Value,
Strong Power,
Simple!**

Q-TSC (Quick – Transmit Signal Copy)

copy transmit signal not only frequency but CTCSS / DCS information in the transmit signal

Advanced Noise Cancellation Technology

automatically filters out background noise, providing crystal-clear audio.

Offers advanced features and reliable performance, and ensuring exceptional value without compromising quality.

- Quick Transmit Signal Copy
- Noise Cancellation
- Built-in Scrambler
- 1,800mAh High Capacity Battery
- Large, full dot-matrix, 3 color-selectable display and keypad
- Semi-Duplex dualband, V/V-U/U and FM broadcast receiver
- 200 memory channels, any mix of VHF/UHF
- Internal VOX and inversion scramble
- Alphanumeric channel labels
- Direct frequency input from keypad
- Professional-grade signaling features
- Variety of scanning modes
- Wide and narrow FM TX/RX



DJ-CRX7PLUS

**ALINCO**
INCORPORATED

Advanced Features

Professional-grade signaling features

Including DTMF, CTCSS, DCS, Tone-burst tones with Talk-around, Reverse, BCLO, TOT and more!

Variety of scanning modes

including Programmed, CTCSS/DCS tone, VFO, FM broadcast and Memory with skip feature.

Voice compander

Reduces noise and enhances audio clarity.

Specifications

GENERAL

	DJ-CRX7Plus
RX Frequency Coverage (76-108MHz Included)	136-174MHz 400-438MHz
TX Frequency Coverage	136-174MHz 400-438MHz
Modulation	F3E (16K0F3E/ 11K0F3E / RX only WFM)
CH Steps	2.5, 5, 6.25, 10, 12.5, 20, 25, 30 and 50KHz
Operation Voltage	DC7.4V
Usable temperature range	-20°C ~ +55°C (-4F ~ 131° F)
Frequency Stability	± 2.5ppm
Dimensions	92 x 57 x 35mm (Including Battery)
Weight (g)	Approx 213g. (Include Antenna and battery)

TRANSMITTER

Output Power	Approx. 5 (VHF) 4-4.5W(UHF) /2W /1W
Frequency Deviation	±5kHz / ±2.5kHz
Spurious Emission	-60dB or less

RECEIVER


Receiver System	Direct Conversion
Sensitivity (12dB SINAD Wide/Narrow)	Wide -12dBu / Narrow -9dBu
Adjacent Channel Selectivity	Wide more than 6dB / Narrow more than 60dB
Audio output power	1W (10% distortion)

Specifications and contents on this brochure subject to change without notice or obligation.

Standard Accessories



Options

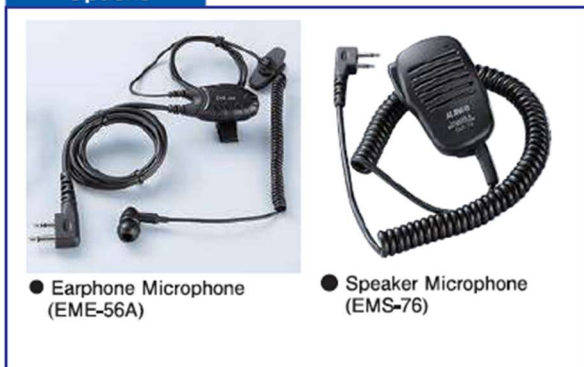

Authorized Dealer:

Copyright Alinco, Inc., Osaka, Japan. All right reserved. Although Alinco has designed this brochure to be as accurate and comprehensive as possible, we reserve the right to make changes at any time to our equipment line, optional accessories, specifications, standard accessories, or availability of any such devices we manufacture and distribute. Please note that certain products and accessories may not be available in all countries of distribution therefore consult your Authorized Alinco Dealer for product availability and pricing. Colors of images herein may appear slightly different from actual products due to print.

ALINCO, INC. Electronics Division

Yodoyabashi Dai-BLDG 13F, 4-4-9 Koraibashi,
Chuo-ku, Osaka 541-0043 Japan
Phone: +81-6-7636-2362 Fax: +86-6-6208-3801
<http://www.ALINCO.com>
E-mail: export@alinco.co.jp